


DIR = low, transfer B to A
 DIR = high, transfer A to B

MEMORY MAP

- >0000 - >7FFF ---- 32Kbyte EPROM
- >8000 - >FFFF ---- 32Kbyte RAM

UNUSED GATES

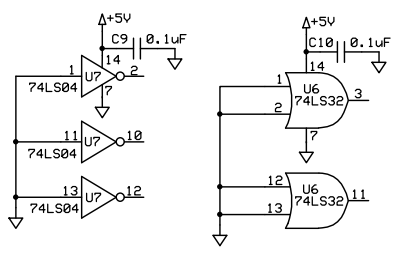

NOTES

- 12MHz crystal gives processor speed of 3MHz, compatible with the normal TMS 9902ANL.
- 16MHz crystal gives processor speed of 4MHz and needs TMS 9902ANL-40 device and modified Baud rate timer in the software.
- Processor pin 2 labelled as /DEN on some datasheets.
- Processor pin 6 labelled as WAITGEN on some datasheets.

| | | |
|-----------------------------------|-----------------------|-------------|
| TMS 99110 | | |
| PCB and Breadboard Project | | |
| Stuart Conner | Rev 0.3 29/12/2016 | Page 1 of 3 |

